
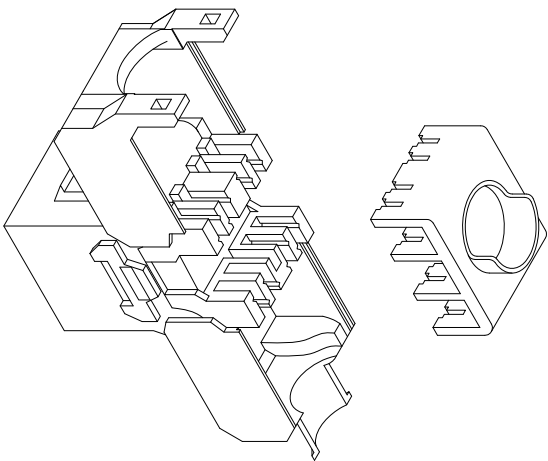

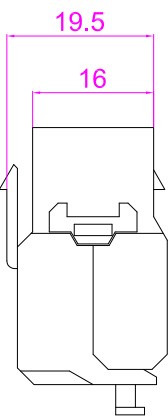


VERSION	DESCRIPTION	DATE
1.0	New Release	2021/10/15

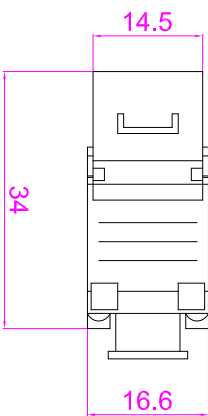

Model: KJ18-C6AUWH

Electrical:

- 1.Voltage Rating: 125 VAC RMS
- 2.Current Rating: 1.5AMP @25°C
- 3.Contact Resistance: 100 mΩ MAX
- 4.Insulation Resistance: 1000 MΩ MIN
- 5.Dielectric strength: DC1000V (AC750V) 50~60Hz, 1MIN

Environmental:

- 1.Storage Temperature: -40°C TO +85°C
- 2.Operation Temperature: 0°C TO 70°C

Mechanical:

- 1.Housing Material: PC
- 2.Insert Material: PBT
- 3.PCB Material: FR-4 Thickness:1.6mm
- 4.Contact Material: Phosphor Bronze Stamp Pin T=0.35mm, Gold Plated 3u"
- 5.IDC Contact Material: Phosphor Bronze T=50-80u Nickel Plating
- 6.Wire Range: AWG 22~26

Mechanical capacity

IDC: Max.200 punching times.
 Jack: 750 cycles Plug-Jack mating and unmating test
 Mating/Unmating Force: 30 N Max.

Industry Standards

Comply with ANSI/TTA - 568-c.2, ISO/IEC 11801, IEC 60603-7

 联超电子(东莞)有限公司 SYNOX TECH (DONGGUAN) CO., LTD		Tel: 886-2-2738-6511(Taipei) +86-769-85393250(china) Fax: 886-2-2739-2232(Taipei) +86-769-85383353(china) E-mail: sales@synox.com.tw Website: www.synox.com.tw		
 UNIT mm mm XX ±0.3 XXX ±0.10 XXXX ±0.05	unless otherwise stated Tolerances angular ±2	TITLE CAT.6A RJ45 Toolless 180 Degree Keystone White	P/N 1901500011	DRAWN BY Kay
SIZE A4 SCALE Free	Customer P/N 13393	PAGE 1/2	APPROVAL BY	CHECK BY