



CAT.6, UTP, Flat, 4P*36AWG, 568B, Patch Cord, XX Meters



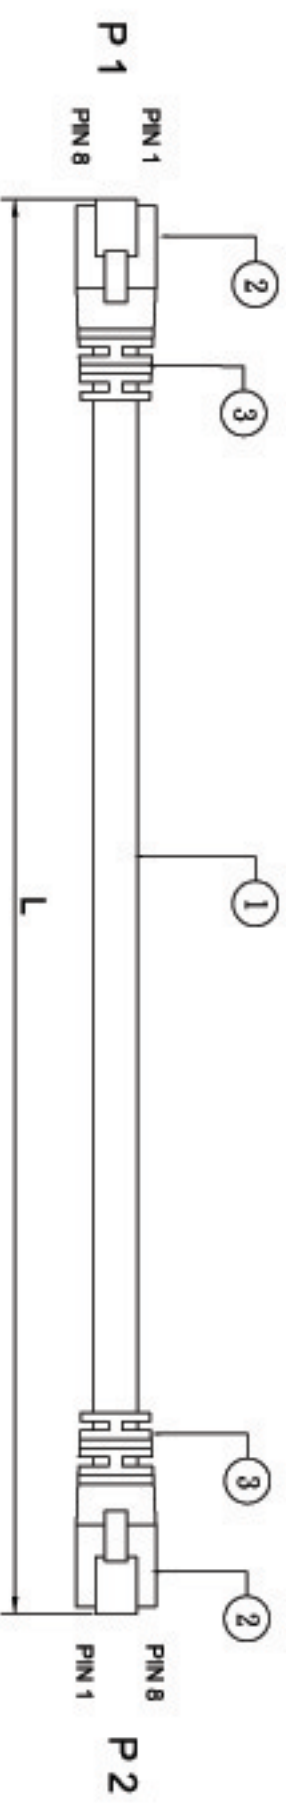

PIN OUT

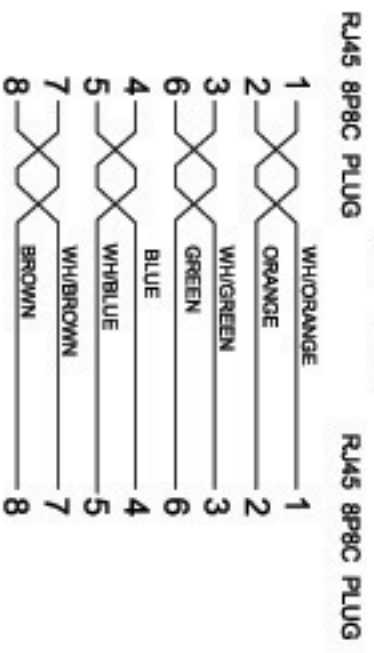

Specification:

1. CABLE:
CAT.6 UTP Flat 4P*36AWG STRANDED,
PVC(Low lead,low cad) Jacket Color:White O.D.=1.1*4.1mm.
2. CONNECTOR:
P1&P2 : RJ45, 8P8C, Short plug, Pin gold plated 50u".
3. MOLDING TYPE:
P1&P2: Molding w/o cap
4. TEST:
(1)100% Open Short and miswire test
(2)Insulation resistance 1 MQ MIN.
(3)Pass The Channel Test
5. Not Printing
6. The tolerance of jumper length below 5 Meters is -10 to 50 mm , for longer than 5 Meters is -10 to 200mm .

		SPECIFICATION	CAT.6, UTP, Flat, 4P*36AWG, 568B, Patch Cord	REV.	1.0
UNIT	MM	Customer	DRAWN BY	Key	
SCALE	1 : 1	STYNOX NO.	CHECK BY	Michael	
PAGE	1/1	DRAW NO.	APPROVAL BY	Johnson	